


VCVI-2

IP Vandalproof intercom, 2 buttons with backlit labels



- Front panel made of 2mm stainless steel
- 2 buttons with LED and backlit label areas
- VoIP, SIP
- 10W class D amplifier
- 2 relays
- IP-65
- Loudspeaker and microphone poke protection
- PoE

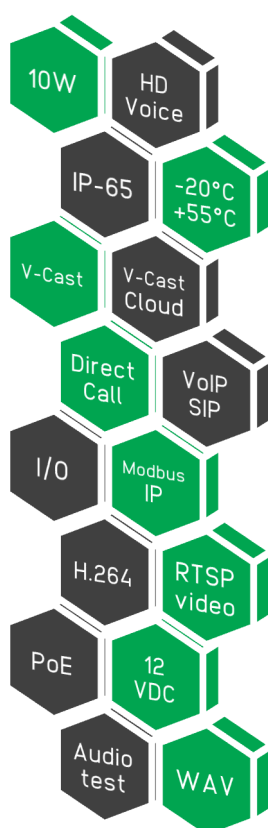

VCVI-2 is an IP Vandalproof intercom with 2 buttons designed for voice communication via the IP network infrastructure. Its vandalproof and waterproof design is made of acid-resistant, stainless steel (grade 1.4301), which enables continuous use in difficult conditions. The intercom is designed for surface or flush mounting, depending on the selected housing. For intuitive operation, each call button has an individual label area with backlight.


The intercom can be registered in the V-Cast server, the V-Cast Cloud service as well as in a standard VoIP telephone exchange supporting the SIP protocol. It can also work in serverless Direct Call mode (Peer-To-Peer P2P), in which the connection is established directly between devices.

VCVI-2 allows to make individual calls, group calls, and general calls, as well as storing recorded voice and alarm messages in the internal memory. Messages can be played depending on the current device status, activated by the operator during a call, or via HTTP.

The intercom supports several operating modes that can be used depending on current needs such as conversation, Push-To-Talk, listening, paging, broadcast. The intercom allows you to make VoIP video calls. During the call, an RTSP video stream is downloaded from the CCTV camera, which together with the audio is sent to the videophone.

The intercom enables intelligible voice communication thanks to the transmission of sound in a wide acoustic band, and an efficient class D power amplifier, which provides very high volume. The intercom supports two different echo cancellation algorithms, including AEC and attenuate, ensuring very good quality of voice communication.

The VCVI-2 intercom module has 2 relays for controlling external devices, 3 inputs for connecting buttons/external sensors and systems, and a 4x4 numeric keypad connector that can also serve as an additional 14 inputs.

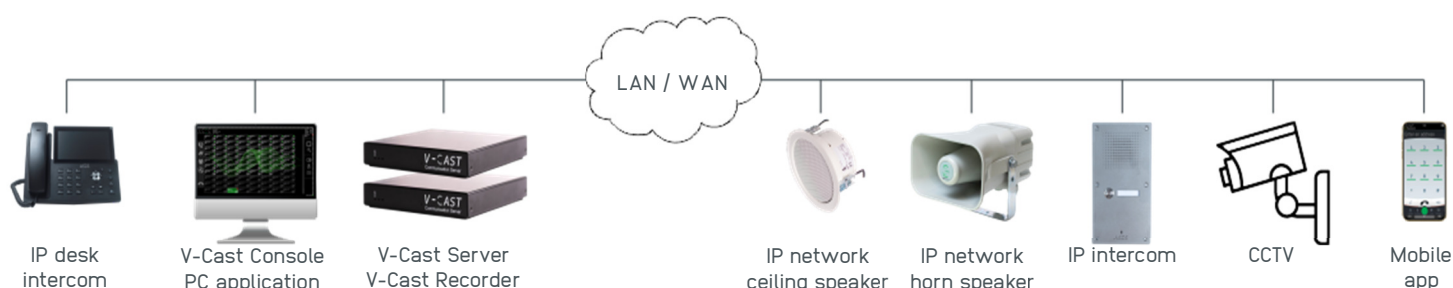

TECHNICAL PARAMETERS

AUDIO

Power amplifier:	10W class D
Audio codecs:	g.711a, g.711u, g.722, g.726
Volume adjustment:	Independent for conversation, ring, tones, prerecorded audio files, paging, emergency message volume, microphone input gain, microphone input gain in listen mode
Operating modes:	Conversation, Push-To-Talk, Paging, Broadcast, Emergency, Listening-in, Audio files playback, Noise detection
Audio diagnostics:	Verification of the audio path (speaker-microphone)

VIDEO

Camera:	IP-RTSP
Video codecs:	H.264

CONNECTORS

Ethernet:	1x RJ45 (100Mbps)
Power In:	1x
Power Out:	1x (12VDC)
Digital inputs:	3x + 14x (keyboard connector)
Relay:	2x NO/NC (60V, 100mA)
InfoLED output:	1x

ELECTRICAL

Power supply:	PoE (IEEE 802.3af standard, Class 0) or 12VDC
Power consumption:	1W (nominal), 15W (max)

MECHANICAL

Dimensions (W x H x D):	215 x 115 x 52mm
Weight:	0,9kg
Front panel:	2mm, acid-resistant, stainless steel, grade 1.4301
Montage:	Surface or flush mounting
IP rating:	IP-65*

ENVIRONMENTAL

Operating temperature:	-20°C do +55°C
Relative humidity:	5% - 90% not condensing

PROTOCOLS

IP protocols:	ARP, IPv4, ICMP, IGMP, TCP, UDP, DHCP, DNS, SIP, HTTP, Telnet, RTP, RTCP, SNTP, Modbus TCP, Modbus UDP
SIP protocols:	RFC 3261, SIP Info (DTMF), RFC 2833 (DTMF)
IP address:	Static, DHCP
Management:	http, telnet

CERTIFICATES

CE

* Applies when mounted in surface-mounted housing with rain hood (VCVI_WB + VCVI_WBRH)

ACCESSORIES

Item number	Name
VCVI_FB	Flush mounting back box for VCVI
VCVI_FBRH	Rain hood for flush mounting back box VCVI_FB
VCVI_WB	Surface mounting back box for VCVI
VCVI_WBH	Surface mounting housing for VCVI-WB
VCVI_WBRH	Surface mounting housing with rain hood for VCVI-WB

Would You like to know more?



ADVANCED
SECURE
COMMUNICATION
SOLUTIONS

ASCS Sp. z o.o.
Żwirki i Wigury 65A
43-190 Mikołów
Poland

www.v-cast.pl/en
www.ascs.pl
ascs@ascs.pl
tel.: +48 32 442 00 24